


PERFECT Style 324

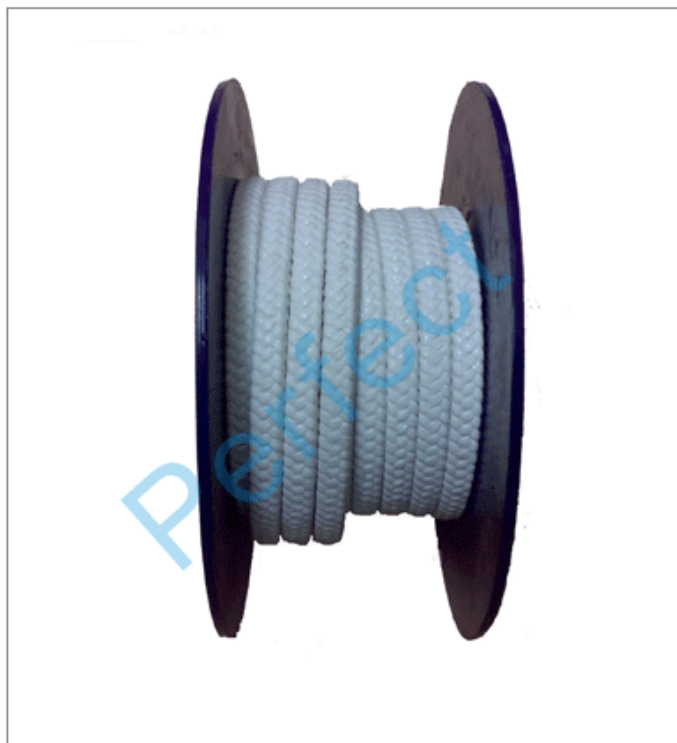

PRODUCT DESCRIPTION

This packing is manufactured from PUR PTFE yarn impregnated with PTFE dispersion by a special process. This packing has dimensional stability, high compressibility and low coefficient of friction.

SERVICE PARAMETERS

Maximum Service Temperature:

-200 to +260 °C

Compatible pH Range:

0 to 14 ph range

Pressure Rating:

100

Velocity

5 Mtrs/sec.

SERVICE

For valve, reciprocating rods, centrifugal pumps, mixers, corrosive gases, acids and alkalies, ammonia, solvents, hydrocarbons, foodstuff and pharmaceutical industries.

Information supplied this catalogue, is based on our general experience and is given in good faith, because of the many particular factors, which are out side of our knowledge and control and affect the use of products, nowarranty is given is to be implied with respect to such information.

PERFECT Packing Industries

19/A Revabhai Industrial Estate, C.T.M Cross Road,
Amraiwadi, Ahmedabad-380026(Gujarat-India)
Ph No.079-25857824
Fax No. 079-28587871

www.perfectpacking.com
info@perfectpacking.com

DISTRIBUTED BY: